
BA 5439RT

Rivet Tape

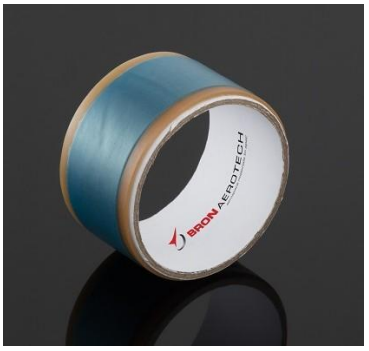

Description:

BA 5439RT is a single-sided process improvement tape designed specifically to prevent defects in rivet setting operations. BA 5439RT is constructed with a heavy-duty vinyl backing, natural rubber adhesive, and a transparent non-adhesive window to prevent residue left behind on the fastener head. The adhesive edges provide superior adherence to many types of production surfaces.

Features & Benefits:

- Conformable for dome head rivets and contoured surfaces
- Easy to use
- Hand tearable
- High dielectric strength
- Excellent visibility of production surface
- Stable and uniform unwind

Applications:

Fastener installation | Rivet setting | Surface protection

Construction/ Typical Properties	Value		Test Method
Adhesive:	Rubber		
Backing:	PVC		
Elongation at Break:	180%		IEC 60454-2
	Imperial	Metric	
Adhesive Thickness:	.5 mils	13 µm	
Backing Thickness:	4.5 mils	114 µm	
Total Thickness:	5 mils	127 µm	IEC 60454-2
Tensile Strength:	14 lb/in	24.5 N/cm	IEC 60454-2
Adhesion to Backing:	17 oz/in	1.9 N/cm	IEC 60454-2
Peel Adhesion:	17 oz/in	1.9 N/cm	IEC 60454-2
Dielectric Strength:	40,000 V	40 kV/mm	
Flammability:	Self-Extinguish		

Approvals:

- BAC 5034-4 Riveting/Manufacturing Protection

The physical properties listed above are typical values and are not to be construed as specifications. Our suggestions and recommendations for use are based on tests we believe to be reliable. Bron Aerotech does not warrant that the product is fit for any particular purpose. Purchaser must determine suitability of the product for the intended use. Bron Aerotech, Inc. assumes no liability for claims beyond the replacement value of our product proved to be defective. Manufactured for and distributed by Bron Aerotech.

Copyright© Bron Aerotech
Last Updated: 8/21/2026