



Absolutely Riveting!

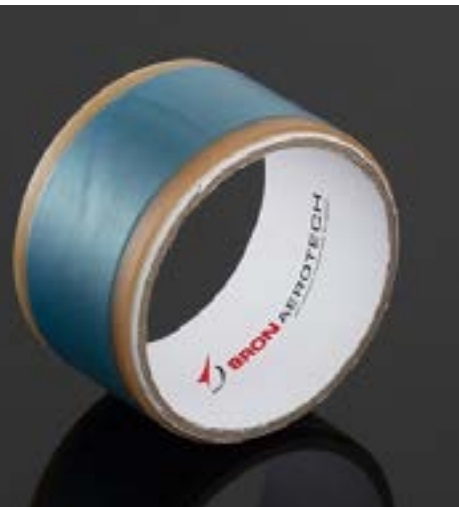

BA 5439RT

is a process improvement tape designed specifically to prevent defects in rivet setting operations. It is constructed with a heavy-duty vinyl backing, natural rubber adhesive, and a transparent non-adhesive window to prevent residue on the fastener head. The adhesive edges provide superior adherence to many types of production surfaces.

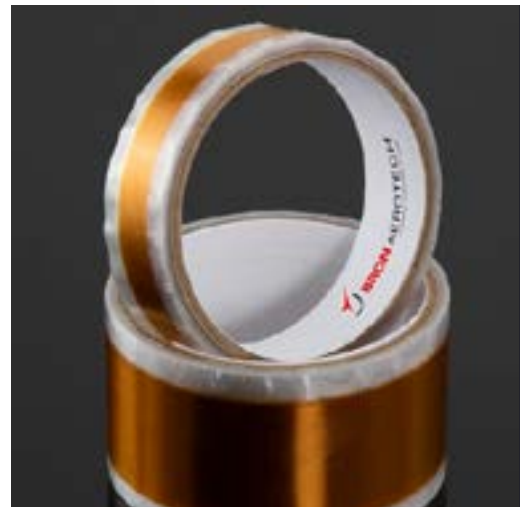


BA 6019RT

is used for rivet setting. It has a thin conformable protective backing that offers easy application. It does not leave residue after extended attachment time. The tape also resists puncturing and tearing. It provides easier application with some conforming characteristics and has a film laminated to the adhesive side of the tape that does not allow any adhesive to come in contact with the rivet head during use. It also has a thin overall profile to accommodate fastener setting tolerances.



BA 55410RT

is used for rivet setting. It has a heavy backed removable protective film to make application easier and leaves no residue after long attachment time. A film laminated to the adhesive side prevents adhesive contact with the rivet head during use. It remains removable and leaves no adhesive residue after long dwells or moderate heat exposure.

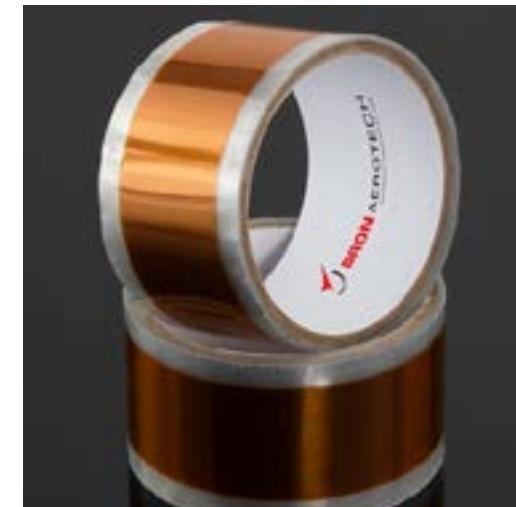

BA 951RT

is used for rivet setting. It has a heavy backed removable protective film to make application easier and leaves no residue after long attachment time. A film laminated to the adhesive side prevents adhesive contact with the rivet head during use. It remains removable and leaves no adhesive residue after long dwells or moderate heat exposure.

