
BA 876

Single Coated Polyethylene Tape

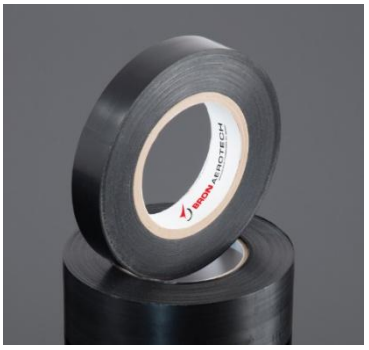

Description:

BA 876 is a single-sided heavy-duty polyethylene tape with a synthetic rubber adhesive. BA 876 also has features like UV resistance, hand tearablility, and high-tensile strength, perfect for applications such as UV mitigating for up to 7-days. BA 876 also meets both NFPA 701 and ASTM E84 standards.

Features & Benefits:

- Conformable
- Clean removal
- UV resistant for 7 days
- Watertight seal

Applications:

Agricultural bagging | Greenhouse repair | Masking windows and doors during stucco | Shrink wrapping

Construction/ Typical Properties	Value		Test Method
Color(s):	Black, White, Red and Yellow		
Adhesive:	Synthetic Rubber		
Permeability to Water Vapor:	1.7 g/m^2/24h		ASTM E96
Elongation at Break:	90%		ASTM D1000
	Imperial	Metric	
Total Thickness:	7 mils	178 µm	
Tensile Strength:	22 lb/in	39 N/cm	
Adhesion to Steel:	75 oz/in	8.2 N/cm	PSTC - 101 Mod
Adhesion to Backing:	32 oz/in	3.5 N/cm	PSTC - 101 Mod

Approvals:

- BAC 5034-4 General shop use and outdoor protection

The physical properties listed above are typical values and are not to be construed as specifications. Our suggestions and recommendations for use are based on tests we believe to be reliable. Bron Aerotech does not warrant that the product is fit for any particular purpose. Purchaser must determine suitability of the product for the intended use. Bron Aerotech, Inc. assumes no liability for claims beyond the replacement value of our product proved to be defective. Manufactured for and distributed by Bron Aerotech.

Copyright© Bron Aerotech
Last Updated: 8/21/2026